

PORT-A-CHILLER® MANUFACTURING DATA


Shipping/operating weights and dimensions are approximate.

CHILLER MODEL	NOMINAL CAPACITY*	MAX. FLOW (GPM)	SHIPPING WT/ OPERATING WT	DIMENSIONS (inches)					
				A	B	C	D	E	F
90	11	250	750/1200	52	28	13	3	1 ⁵ / ₈	5/8
125	15	350	1000/1630	52	28	18	4	2 ¹ / ₈	7/8
180	22	450	1475/2475	69	48	13	4	2 ¹ / ₈	7/8
250	30	700	2000/3810	69	48	18	6	2 ¹ / ₈	1 ¹ / ₈
360	43	900	3250/5150	104	60	13	6	(2) 2 ¹ / ₈	(2) 7/8
510	61	1300	4100/6750	104	60	18	8	(2) 2 ¹ / ₈	(2) 1 ¹ / ₈
710	85	1300	4900/8100	128	65	18	8	(3) 3 ¹ / ₈	(3) 1 ¹ / ₈

*Rated capacities are for DX operation with R-22 at 12°FΔT. For other applications, consult factory.

Seawater connections are 125# ASA flange.

Custom configurations and applications available on request.

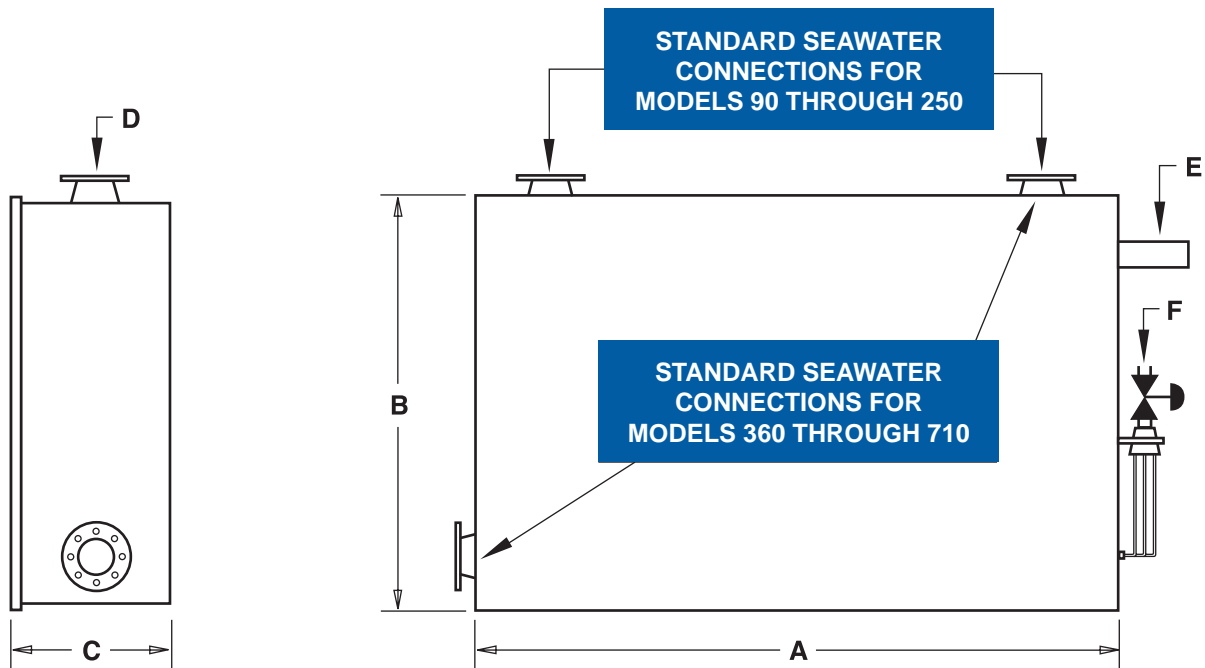


Integrated Marine Systems Inc.
Manufacturers of Refrigeration

P.O. Box 2028 775 Haines Place
 Port Townsend, WA 98368
 800/999-0765 360/385-0077
 sales@IMSpacific.com www.IMSpacific.com



Wescold Systems Inc.
 4816 15th Ave. NW, Seattle, WA 98107
 800/562-1945 206/284-5710
 sales@WESCOLD.com www.WESCOLD.com